VB400 14-PORT DOCK

Host multiple VB400 cameras for simultaneous rapid charging, configuration and video downloading.



GENERAL INFORMATION	
Product Code	VB-400-DOCK-14/US, VB-400-DOCK-14/ROW, VB-400-DOCK-14/UK, VB-400-DOCK-14/EU, VB-400-DOCK-14/AUS
Hosts Multiple VB400s	14 VB400 camera ports
Scalability	Multiple docking stations can be connected to a DockController
Compatibility	Compatible with DockController DC-200
Easy To Deploy	Connection is a single USB to the DockController, and a mains adaptor for power (USB cable supplied)  Eliminates need for separate wiring
	to each camera
Speedy Plug-in / Pull-out Connectivity	VB400 cameras can be easily docked or undocked for speedy use
Flexible Docking	Flexible for use with camera accessories attached
	Can be securely fastened to a shelf or other mounting surface - can be secured at an angle
Warranty	1 year return-to-manufacturer warranty including email and telephone support
	Extended warranty available

Weight	77.6 oz (2.2 kg)   123.4 oz boxed (3.5 kg boxed)
CHARGING, POWER & INTERFACE	
Charging	Up to 8 hrs from a fully flat VB400 battery
Power Requirement	12V/5A PSU, input 100-240V (PSU supplied)
Interface	USB 2.0 compatible
	USB 3.0 compatible

32° to 104°F (0° to 40°C) -67° to 158°F (-55° to 70°C)


7.9 x 1.5 x 17.1 in (200 x 38 x 436 mm)


**SIZE AND WEIGHT** 


Operating Temperature

Storage Temperature

Dimensions

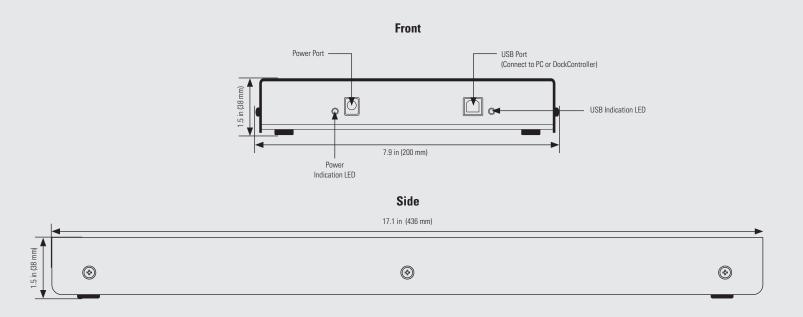

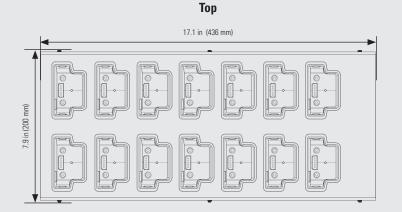

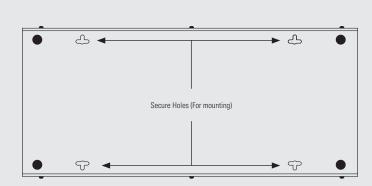

**Bottom** 



## Support and Distributed by:

Radiocoms Systems Ltd Unit 2 & 3 The Chase Centre, 8 Chase Road, Park Royal, London NW10 6QD

www.radiocoms.co.uk sales@radiocoms.co.uk 033 3939 0022



Motorola Solutions Inc., 500 W Monroe St, Chicago, IL 60661. U.S.A

Availability is subject to individual country law and regulations. All specifications shown are typical unless otherwise stated and are subject to change without notice. MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2022 Motorola Solutions, Inc. All rights reserved. 02-2022 [LD11]